

P8R8DIO

Isolated 8 Digital Input & Relay Output Board




PIN Assignment



Software



Manual

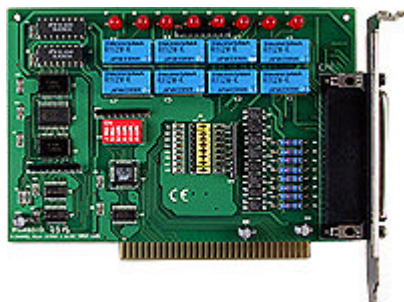

Functional Description

The P8R8 DIO is a 8 Isolated input and 8 relay output interface board designed for control and sensing applications. This interface board is easily installed in any PC/AT/XT or compatible computer. The P8R8 DIO Provides 8 electromechanical relay outputs and 8 optically isolated inputs. The P8R8 DIO can be used in various applications including load switching, external switching, contact closure, etc.

Features

- Relay output Channel
- optically isolated digital input channels
- AC/DC signal Input ; AC signal input with filter
- Connector pin assignment is compatible to 725 series
- Power Requirements : +5V 200mA(max.) ; +12V 260 mA (max.)

Applications

- Factory Automation
- Product Test
- Laboratory Automation
- Security Control

Software

- Toolkit for DOS
- Toolkit for Windows 95/98
- Toolkit for Windows NT
- Toolkit for Windows 2000/XP
- Toolkit for LabVIEW 95/98
- Toolkit for LabVIEW NT
- Toolkit for LabVIEW 2000/XP
- ActiveX Control (OCX) 95/98
- ActiveX Control (OCX) NT
- ActiveX Control (OCX) 2000/XP
- Driver for LINUX
- Driver for DasyLab

Option

- DB-37 : Direct Connect Screw Terminal Board For Analog I/O
- DN-37 : Screw Terminal Board For Analog I/O
- CA-4002: 37-pin Male D-sub connector with Plastic cover

Specifications

Relays

Relay output Channels	8
Contact Rating	0.3 A :120V AC/DC / 1A : 30Vdc
Contact arrangement	Output channel 0-3 are Form C
Output channel 4-7 are Form A	
Operating time	5 m Sec
Release time	10m Sec
Expected life > 100,000 times (Electrical at 30V/1A)	

Inputs

Channels	8
Type	Non-polarized OPTO-isolated , (PC-814)
Input Voltage	AC/DC 5-24V (Vac Freq:50~1Khz)
Input Impedance	1.2 KW
Response Time	20mS (Without filter)22mS (With filter)
Isolation	500V channel-channel & channel-ground

General Environmental

Operating temp	0-50 deg / C
Storage temp	-20 to 70 deg / C
Humidity	0 to 90% non-condensing
Dimensions	175 cm x 121 cm

Ordering Information

P8R8DIO	8-channel Isolated D/I and Relay Output
---------	---