


## DN-37/DN-37-A/DN-37-381/DN-37-381-A - TWO 37-PIN D-SUB CONNECTOR




REF: N/A

Categoria [Acessórios](#)

Tags: [DN-09-2F](#), [DN-100](#), [DN-20-381](#), [DN-25](#), [DN-37](#), [DN-37-381](#), [DN-37-381-A](#), [DN-37-A](#), [DN-50](#), [DN-50-381](#), [DN-68A](#), [DN-SSR4DC](#), [Two 37-pin D-sub connector](#)

## GALLERY IMAGES

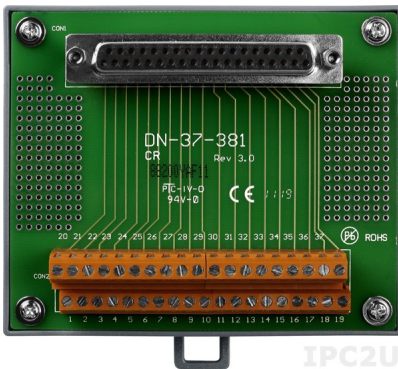

## PRODUCT DESCRIPTION



## Functional Description

### DN-37/DN-37-A

- I/O Connector Block with DIN-Rail Mounting
- Two 37-pin D-sub connector (One for expansion)
- Pin to Pin screw terminal for I/O connected
- Pitch : 5.08 m/m
- Dimension : 148mm x 76mm
- Current rating: 1 A Max.
- Dielectric withstanding voltage: 250VAC for 1 minute
- DC rating: 50 V Max.

### DN-37-381

- I/O Connector Block with DIN-Rail Mounting
- Two 19-pin header
- Pin to Pin screw terminal for I/O connected
- Pitch : 381mm(0.150inch)
- Dimension : 103mm x 86mm

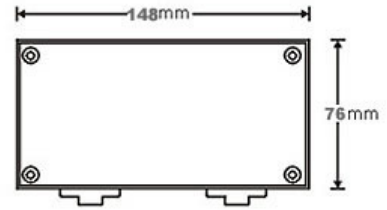

## ADDITIONAL INFORMATION

### Modelos

DN-37, DN-37-381, DN-37-381-A, DN-37-A